

AC controller 30A



**Regolatori di velocità a Mosfet per motori Brushless AC, Brushless DC, Asynchronous
Mosfet speed controller for Brushless AC, Brushless DC, Asynchronous motors**

Applicazioni / Applications

L'azionamento può essere personalizzato utilizzando il nostro software che consente all'utente di modificare i diversi parametri (salvati in EEPROM). La connessione con il PC viene effettuata tramite un cavo USB o un adattatore Bluetooth

Ogni unità dispone di sensori di temperatura interni e del dissipatore di calore. Supporta diversi tipi di sonda termica motore.



Inoltre la frequenza PWM può essere impostata dall'utente modificando un parametro predefinito e dispone di un inclinometro per un controllo sicuro. Il firmware può essere personalizzato per eseguire diverse attività utili per l'applicazione finale.

The drive can be customized using our software that allows the user to change the different parameters (saved in EEPROM)

The connection with the PC is made using a USB cable or a Bluetooth adapter

Each drive has internal and heatsink temperature sensors. Moreover it supports different types of motor thermal probe

Furthermore the PWM Frequency can be set by the user changing a predefined parameter and it has an inclinometer for safe control. The firmware can be customized to perform different tasks useful for the final application.

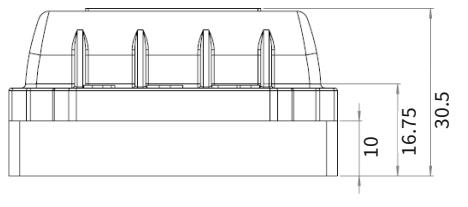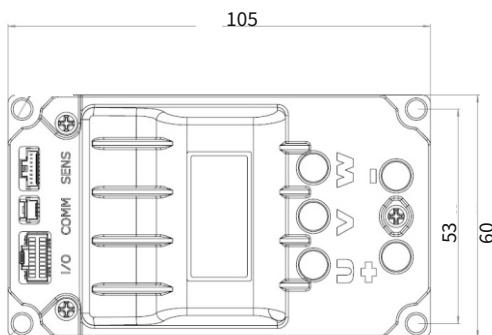

Dimensioni
Dimensions

FEATURES

Battery Rated Voltage- V DC	12 ÷ 48
Rated Output Power- kW	1,7
Rated Current- A	30
Peak Current (2 minutes)- A	40
Boost Current (10 seconds)- A	50
PWM Frequency- kHz	10 (by default)
Digital Input	4
Digital Output	2
Analog Input- 0V ÷ 10V	2
Analog Output- 0V ÷ 10V	-
Fieldbus	CANopen®
Feedback	Hall, Sinusoidal Hall, Incremental Encoder SinCos, Sensorless
Brake management	-
Motor types	Brushless AC, Brushless DC, Asynchronous
Connection type	M4 busbar (DC Link & Phases)
Operating Temperature- °C	0 ÷ 40
Protection degree	IP 20
Weight- g	250