RPH / CS

Pedaliera con sensore a effetto hall chiusura stagna

Hall effect waterproof foot pedal

Applicazioni / Applications

Pedaliera di comando per veicoli elettrici con uomo a bordo

Control pedal for man-on-board electric vehicles

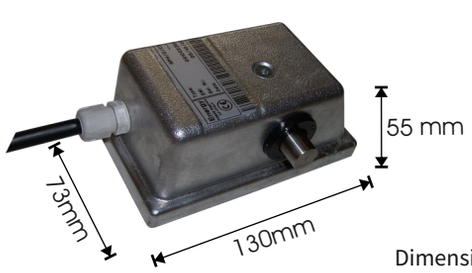

Dimensioni

Dimensions

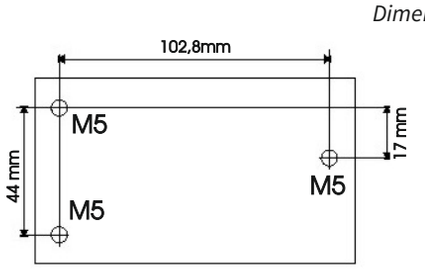

CARATTERISTICHE

- Tenuta Ip54
- Tensioni nominali di alimentazione: 24-48V
- Dimensioni ridotte: 130x73x55mm
- Meccanica semplice senza rinvii soggetti a usura
- Cicli di lavoro illimitati
- Sensore a effetto Hall
- Ideale per fissaggio sotto pedana
- Range di tensioni di uscita comprese tra 0-1V e 0-5V tramite trimmer di taratura
- A richiesta tensione di uscita 0-16V
- Regolazione della minima velocita' tramite trimmer di taratura
- Microinterruttore di consenso di marcia
- Perno in acciaio inossidabile
- Corsa meccanica 30°

FEATURES

- *IP 54 Protection*
- *Input voltage: 24-48V*
- *Dimensions: 130x73x55mm*
- *Simple structure without wearing transmissions*
- *Unlimited working cycles*
- *Hall effect sensor*
- *Suitable to be fixed under footboard*
- *Output voltage between 0-1V and 0-5V thanks to an adjustable trimmer*
- *Output voltage 0-16V on request*
- *Trimmer adjustment of minimum speed*
- *Directional microswitch*
- *Stainless steel pivot*
- *Mechanic stroke 30°*

ENERGY s.r.l. Via per Molteno 31, 23848 Oggiono (LC) - Tel:(+39)0341 578782 - info@energylecco.it - www.energylecco.it